




MYSON

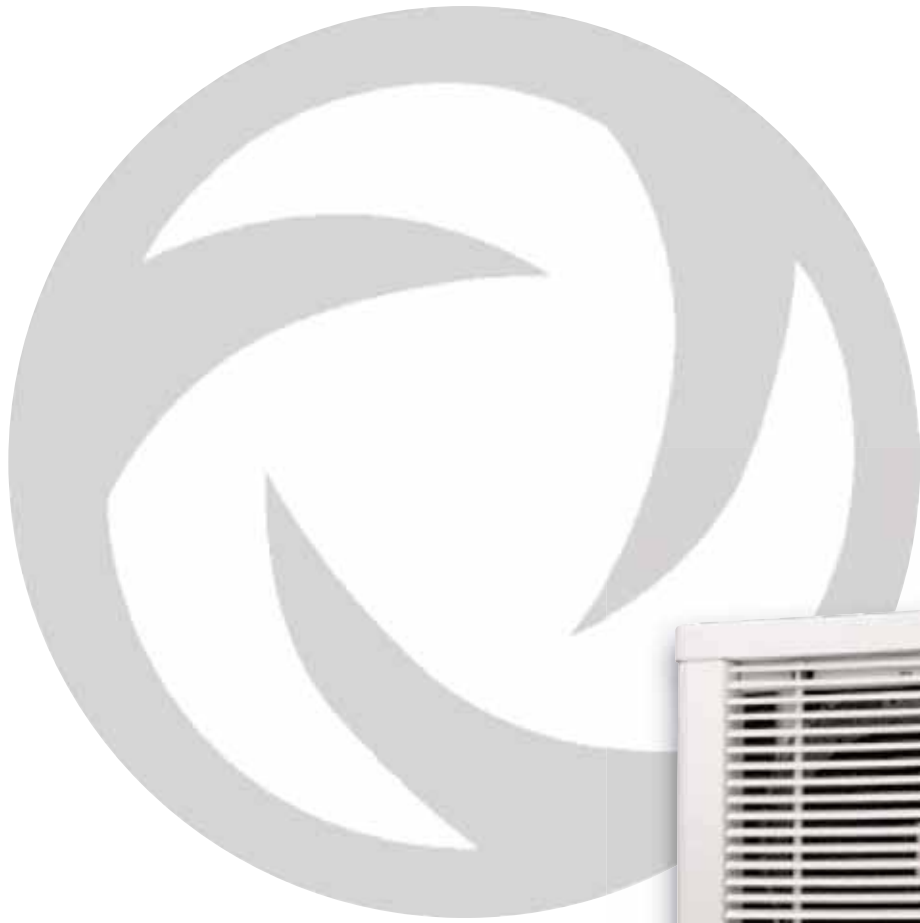

Fan Convectors

heatingthroughinnovation.

## Hydronic & Electric Fan Convectors

Fan Convectors are designed to provide heat in a minimum of space using forced convection. Myson's efficient tangential fan design forces air uniformly across a low pressure drop heat exchanger, resulting in a high heat output from a very compact space. It's a bold claim. It's also true. Myson Fan Convectors deliver excellent heat from a hot water coil or electric element. That's because the fan, blowing across the heating source, transfers 10 to 100 times more heat to the air than is possible from units that rely on radiation or natural convection.

Complete product details along with technical specifications for the Myson Fan Convector family are given on the following pages, showing specific dimensions and configuration, heat output, weights and head requirements.

Myson Fan Convectors all have several features in common:

- Fan assemblies have ball bearings for longer life and quieter service
- Heat exchangers feature copper tubing expanded onto aluminum fins for greater heat transfer efficiency
- Each unit is manufactured to the high standards of MYSON's ISO 9002 certification
- Whispa III, Hi-Line RC, Lo-Line RC, Slim-Line RC and CSU are backed by a Myson 3 year warranty; the coverage for heat exchangers is extended to 10 years
- Whispa E50 Electric has a 1 year product warranty



# heating through

## Contents

Whispa III Hydronic Kickspace .....	4-5
Whispa E50 Electric Kickspace .....	6-7
Whispa III Recessed Wall and Floor .....	8-9
Whispa III RCU Commercial Recessed Wall .....	10-11
Hi-Line RC and HC RC .....	12-13
Lo-Line RC .....	14-15
Slim-Line RC .....	16-17
CSU .....	18-19

Myson Fan Convectors: a lifestyle choice that makes a difference... day after day... year after year.




# innovation.

## Whispa III Kickspace Fan Convectors

Engineered to be efficient


Whispa III is engineered to simply last longer, stay quieter and deliver a heat output you can rely on for accuracy and reliability year after year. It fits easily under a counter, window seat or stairs.

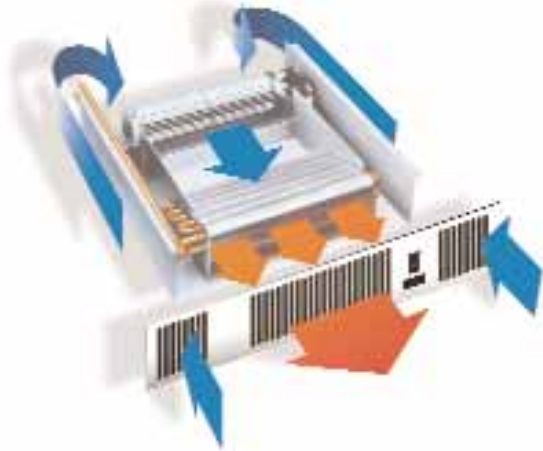

- Whispa III 5000 - delivers 3,589 to 5,443 Btu/hr, replacing up to 10.4 feet of baseboard
- Whispa III 7000 - delivers 5,335 to 7,534 Btu/hr, replacing up to 14.4 feet of baseboard
- Whispa III 9000 - delivers 6,718 to 9,949 Btu/hr, replacing up to 19 feet of baseboard
- ETL Approval
- Whispa III has a 3 year product warranty; 10 year warranty for heat exchanger



### Optional Myson EZ-Hose™ Kit

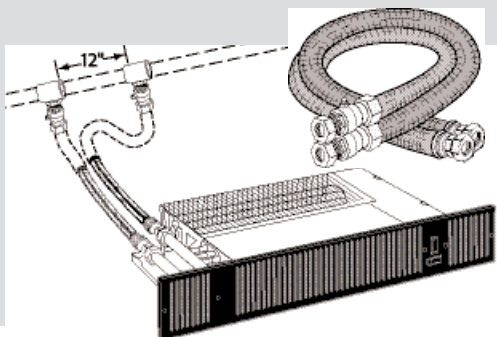

- Flexible — Designed with the installer in mind, the Whispa III 5000, 7000 and 9000, have 30" hoses with a 1/2" female compression fitting on one end and a ball valve with screwdriver slot on the other end, providing enough length to allow installation or service outside of the cabinet.
- Tested — Maximum operating temperature of 250°F and working pressure of 100 psi.

- Easy Installation — Installs in a fraction of the time required for conventional pipe installation... saving time and money.
- Backed with confidence — Myson has over 30 years of experience.
- Compatibility — May be used with both water- and antifreeze-protected heating systems.



Whispa III 5000



Whispa III 7000



Whispa III 9000

**Whispa III 5000, 7000 & 9000 Fan Convector • Btu/hr Heat Output — entering air @ 65°F**

Model	Flow Rate (gpm)	Fan Speed	Air Delivery (cfm)	Entering water temperature (°F)									
				110	120	130	140	150	160	170	180	190	200
WH III 5000	1	Boost	53	1795	2214	2637	3063	3491	3922	4355	4790	5226	5664
		Normal	41	1539	1844	2144	2440	2732	3020	3306	3589	3869	4147
	3	Boost	53	2040	2516	2997	3480	3967	4457	4949	5443	5939	6437
		Normal	41	1749	2096	2437	2773	3104	3432	3756	4078	4397	4713
WH III 7000	1	Boost	81	2427	3009	3598	4194	4796	5403	6014	6630	7249	7872
		Normal	62	1473	1939	2439	2968	3524	4105	4709	5335	5981	6648
	3	Boost	81	2758	3419	4089	4766	5450	6140	6834	7534	8238	8946
		Normal	62	1673	2204	2771	3373	4004	4665	5351	6062	6797	7554
WH III 9000	1	Boost	124	3308	4073	4844	5619	6398	7181	7967	8755	9546	10340
		Normal	82	2874	3446	4009	4563	5110	5652	6187	6718	7245	7767
	3	Boost	124	3759	4629	5504	6385	7271	8160	9053	9949	10848	11750
		Normal	82	3266	3916	4556	5185	5807	6422	7031	7634	8233	8827

**Whispa III 5000, 7000 & 9000 Heat Comparison @180°F Water Temp.**

Model	Flow Rate (gpm)	Fan Speed	Baseboard (525 Btu/ft)	C.I. Radiators (225 Btu/sq ft)	Dimensions			Weight Unit (lbs)	Weight Packed (lbs)	Friction	
					H	W	D			Flow Rate (gpm)	Loss (head) FT WG (gpm)
WH III 5000	3.0	Boost/Normal	10.4 / 7.8	24.2 / 18.1	3-15/16"	19-1/2"	12-13/16"	9	11	1.0/3.0	0.75 / 4.9
WH III 7000	3.0	Boost/Normal	14.4 / 11.5	35.5 / 26.9	3-15/16"	21-5/8"	12-13/16"	10	13	1.0/3.0	0.85 / 5.9
WH III 9000	3.0	Boost/Normal	19.0 / 14.5	24.2 / 18.1	3-15/16"	23-3/4"	12-13/16"	12	15	1.0/3.0	1.0 / 6.89


## Whispa E50 Kickspace Fan Convector

Engineered to be efficient

Whispa E50 simply lasts longer, stays quieter and delivers a heat output you can rely on for accuracy and reliability. It fits easily under a counter, window seat or stairs.

- Whispa E — electric fan convector delivers up to 1,600 watts or 5,460 Btu/hr, replacing up to 10 feet of baseboard
- Installs in areas where hydronic heat isn't feasible
- Easy to install
- Heat just about anywhere in your home
- Chassis is manufactured from zinc-coated painted steel
- Hardened aluminum grill for strength and durability
- Temperature limit switch automatically shuts power to unit in the event of excessive temperature resulting from restricted airflow
- ETL Approval
- 1 year product warranty



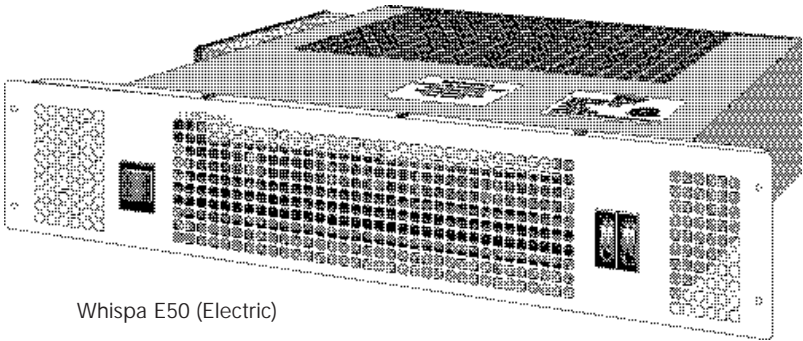

Whispa E50 (Electric)



**Whispa E50 Electric Kickspace Fan Convactor**

Model	Settings	v/Hz	Watts	BTUs/hr	Amps	Baseboard (525 Btu/ft)	C.I. Radiators (225 Btu/sq ft)	Weight Unit (lbs)	Weight Packed (lbs)	Dimensions		
										H	W	D
WH E50	High	110V/60Hz	1600	5460	13.0	10.4	24.3	8.1	10	4"	19-11/16"	8-7/8"
	Low	110V/60Hz	800	2731	6.5	5.2	12.1					

## Whispa III Recessed Wall and Floor Fan Convectors

Recessed and practical

Reliability, heat output and design flexibility are synonymous with Whispa III.

Flush-mounted wall models fit neatly between standard wall studs, providing out of the way positioning. Ideal for entryways, sunrooms, greenhouses and balconies.

- Whispa III 5000 Wall - delivers 3,589 to 5,443 Btu/hr, replacing up to 10.4 feet of baseboard
- Whispa III 9000 Wall - delivers 6,718 to 9,949 Btu/hr, replacing up to 19 feet of baseboard
- Whispa III 5000 Floor - delivers 3,589 to 5,443 Btu/hr, replacing up to 10.4 feet of baseboard
- Multi-speed blower
- ETL Approval
- Whispa III has a 3 year product warranty; 10 year warranty for the heat exchanger







Whispa III 5000 WM



Whispa III 9000 WM



Whispa III 5000 FM

**Whispa III 5000 WM & 9000 WM Recessed Wall Fan Convectors • Btu/hr Heat Output — entering air @ 65°F**

Model	Flow Rate (gpm)	Fan Speed	Air Delivery (cfm)	Entering water temperature (°F) (Btu/hr)									
				110	120	130	140	150	160	170	180	190	200
WH III 5000 WM	1	Boost	81	1795	2214	2637	3063	3491	3922	4355	4790	5226	5664
		Normal	62	1539	1844	2144	2440	2732	3020	3306	3589	3869	4147
	3	Boost	81	2040	2516	2997	3480	3967	4457	4949	5443	5939	6437
		Normal	62	1749	2096	2437	2773	3104	3432	3756	4078	4397	4713
WH III 9000 WM	1	Boost	124	3308	4073	4844	5619	6398	7181	7967	8755	9546	10340
		Normal	82	2674	3446	4009	4563	5110	5652	6187	6718	7245	7767
	3	Boost	124	3759	4629	5504	6385	7271	8160	9053	9949	10848	11750
		Normal	82	3266	3916	4556	5185	5807	6422	7031	7634	8233	8827

**Whispa III 5000 WM & 9000 WM Heat Comparison @ 180°F Water Temperature**

Model	Flow Rate (gpm)	Fan Speed	Baseboard (525 Btu/ft)	Friction C.I. Radiators (225 Btu/sq ft)	Dimensions			Weight Unit (lbs)	Weight Packed (lbs)	Flow Rate (gpm)	Loss (head) FT WG
					H	W	D				
WH III 5000 WM	3.0	Boost/Normal	10.4 / 7.8	24.2 / 18.1	19-1/8"	16-1/2"	3-5/8"	15	18	1.0 / 3.0	0.13 / 1.2
WH III 9000 WM	3.0	Boost/Normal	19.0 / 14.5	44.2 / 33.9	19-1/8"	19-1/2"	3-5/8"	17	21	1.0 / 3.0	0.4 / 2.77

**Whispa III 5000 FM Recessed Floor Fan Convectors • Btu/hr Heat Output — entering air @ 65°F**

Model	Flow Rate (gpm)	Fan Speed	Air Delivery (cfm)	Entering water temperature (°F) (Btu/hr)									
				110	120	130	140	150	160	170	180	190	200
WH III 5000 FM	1	Boost	81	1795	2214	2637	3063	3491	3922	4355	4790	5226	5664
		Normal	62	1539	1844	2144	2440	2732	3020	3306	3589	3869	4147
	3	Boost	81	2040	2516	2997	3480	3967	4457	4949	5443	5939	6437
		Normal	62	1749	2096	2437	2773	3104	3432	3756	4078	4397	4713

**Whispa III 5000 FM Heat Comparison @ 180°F Water Temperature**

Model	Flow Rate (gpm)	Fan Speed	Baseboard (525 Btu/ft)	C.I. Radiators (225 Btu/sq ft)	Dimensions			Weight Unit (lbs)	Weight Packed (lbs)	Flow Rate (gpm)	Friction Loss (head) FT WG
					H	W	D				
WH III 5000 FM	3.0	Boost/Normal	10.4 / 7.8	24.2 / 18.1	9-7/16"	15-7/8"	9-3/4"	12	15	1.0	0.3

Whispa III Recessed Wall & Floor

## Whispa III RCU Fan Convectors

Engineered to be efficient

The new Whispa III RCU Commercial Fan Convectors is engineered predominantly with the multi-housing market in mind. It solves one of the most perplexing comfort problems of maintaining varied temperatures in specific rooms of individual apartments/houses. Each Myson recessed commercial unit offers superior temperature control room by room, apartment by apartment. No more guessing for effective climate control. Each unit has its own zone valve and is individually connected to the central boiler.

- Connects to a central boiler
- Offers superior temperature control
- Designed to be independently controlled with 24V thermostat (by others)
- Whispa III 5000 RCU - delivers 3,589 to 5,443 Btu/hr, replacing up to 10.4 feet of baseboard
- Whispa III 9000 RCU - delivers 6,718 to 9,949 Btu/hr, replacing up to 19 feet of baseboard
- Whispa III 12000 RCU - delivers 7,160 to 12,149 Btu/hr, replacing up to 23.1 feet of baseboard
- ETL Approval
- Contractor-friendly with built in:
  - Flow control
  - Solenoid valve
  - 24V transformer
  - Fast bleed valves
  - Two isolation valves
- Whispa III RCU has a 3 year product warranty; 10 year warranty for the heat exchanger






Whispa III 5000 RCU



Whispa III 9000 RCU



Whispa III 12000 RCU

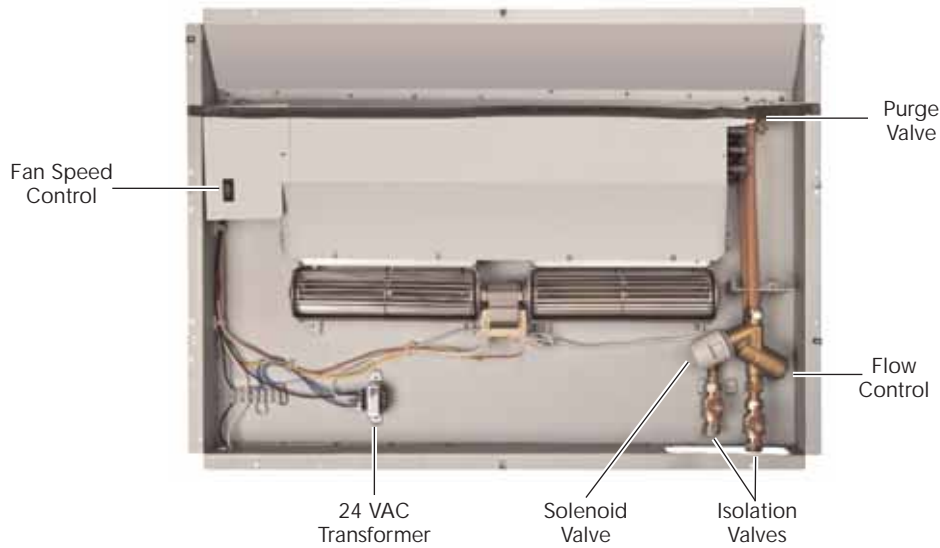

Whispa III RCU Fan Convector • Btu/hr Heat Output — entering air @ 65°F delta T													
Model	Flow Rate (gpm)	Fan Speed	Air Delivery (cfm)	Entering water temperature (°F)									
				110	120	130	140	150	160	170	180	190	200
WH III 5000 RCU	1	Boost	53	1795	2214	2637	3063	3491	3922	4355	4790	5226	5664
		Normal	41	1539	1844	2144	2440	2732	3020	3306	3589	3869	4147
	3	Boost	53	2040	2516	2997	3480	3967	4457	4949	5443	5939	6437
		Normal	41	1749	2096	2437	2773	3104	3432	3756	4078	4397	4713
WH III 9000 RCU	1	Boost	124	3308	4073	4844	5619	6398	7181	7967	8755	9546	10340
		Normal	82	2674	3446	4009	4563	5110	5652	6187	6718	7245	7767
	3	Boost	124	3759	4629	5504	6385	7271	8160	9053	9949	10848	11750
		Normal	82	3266	3916	4556	5185	5807	6422	7031	7634	8233	8827
WH III 12000 RCU	1	Boost	196	3645	4785	5740	6709	7690	8682	9682	10692	11709	12734
		Normal	122	2657	3284	3918	4558	5202	5851	6504	7160	7819	8482
	3	Boost	196	4369	5437	6524	7623	8739	9866	11003	12149	13307	14472
		Normal	122	3019	3733	4454	5180	5911	6649	7389	8136	8887	9640

Whispa III 5000, 9000 & 12000 RCU Heat Comparison @180°F Water Temp.

Model	Flow Rate (gpm)	Fan Speed	Baseboard (525 Btu/ft)	C.I. Radiators (225 Btu/sq ft)	Dimensions			Weight Unit (lbs)	Weight Packed (lbs)	Flow Rate (gpm)	Friction Loss (head) FT WG
WH III 5000 RCU	3.0	Boost/Normal	10.4 / 7.8	24.2 / 18.1	26"	17"	3-9/16"	21	25	1.0 / 3.0	0.75 / 4.9
WH III 9000 RCU	3.0	Boost/Normal	19.0 / 14.5	44.2 / 33.9	26"	20-3/4"	3-9/16"	24	29	1.0 / 3.0	1.07/ 6.89
WH III 12000 RCU	3.0	Boost/Normal	23.1 / 15.5	54.0 / 36.2	26"	33-3/4"	3-9/16"	33	38	1.0 / 3.0	1.4 / 13.1

## Hi-Line RC and HC RC Fan Convectors

Out of the way heating or heating and cooling models

The perfect choice when space saving and out of reach heating or heating and cooling is needed.

- Choice of Heater only or Heater and cooler in one unit
- Hi-Line HC RC delivers 4,377 to 18,352 Btu/hr
- Boosted convection from HC RC fan is ideal for use with today's new lower temperature systems.
- Remote control
- 4 models and 3 fan speeds
- Multi-function digital control
- Single heat exchanger
- ETL Approval
- Hi-Line has a 3 year product warranty; 10 year warranty for heat exchanger




Hi-Line 10-6 with Remote Control



Hi-Line HC and HC RC Fan Convectors • Btu/hr Heat Output - entering air @ 65°F


Model	Flow Rate (3 gpm)	Fan Speed	Air Delivery (cfm)	Entering water temperature (°F)										
				110	120	130	140	150	160	170	180	190	200	
Hi Line 20-14	1	Boost	221	6847	8454	10076	11711	13358	15014	16679	18352	20033	21720	
		Medium	190	6116	7556	9011	10477	11955	13441	14936	16439	17948	19465	
		Normal	146	5152	6367	7593	8831	10077	11332	12593	13862	15136	16417	
	3	Boost	254	7870	9717	11582	13461	15354	17257	19171	21094	23026	24965	
		Medium	218	7030	8685	10357	12043	13741	15449	17168	18895	20630	22373	
		Normal	168	5922	7318	8728	10150	11583	13025	14475	15933	17398	18870	
	Hi Line 15-10	1	Boost	171	5237	6470	7717	8973	10240	11514	12796	14084	15378	16678
			Medium	141	4035	4987	5949	6919	7896	8879	9869	10864	11863	12866
			Normal	106	3591	4440	5297	6161	7032	7909	8791	9679	10571	11466
3		Boost	196	6019	7437	8870	10314	11770	13234	14708	16188	17676	19170	
		Medium	162	4638	5732	6838	7953	9076	10206	11344	12487	13636	14789	
		Normal	122	4128	5103	6088	7082	8083	9091	10105	11125	12150	13179	
Hi Line 10-6		1	Boost	112	3677	4545	5423	6308	7199	8097	9000	9908	10820	11736
			Medium	88	2896	3581	4272	4969	5672	6381	7092	7808	8528	9251
			Normal	73	2402	2969	3543	4121	4704	5291	5882	6475	7072	7672
	3	Boost	129	4226	5224	6233	7250	8275	9307	10345	11388	12437	13490	
		Medium	101	3329	4116	4910	5712	6520	7334	8152	8975	9802	10633	
		Normal	84	2761	3413	4072	4737	5407	6082	6761	7443	8129	8818	
	Hi Line 7-4	1	Boost	68	2533	3132	3737	4347	4962	5581	6204	6830	7459	8092
			Medium	54	1942	2401	2866	3335	3807	4282	4761	5242	5725	621
			Normal	42	1409	1743	2081	2421	2765	3110	3458	3808	4159	4513
3		Boost	78	2912	3600	4295	4996	5703	6415	7131	7851	8574	9301	
		Medium	62	2232	2760	3294	3833	4376	4922	5472	6025	6581	7140	
		Normal	48	1620	2004	2392	2783	3178	3575	3975	4377	4781	5187	

Hi-Line RC Fan Convector

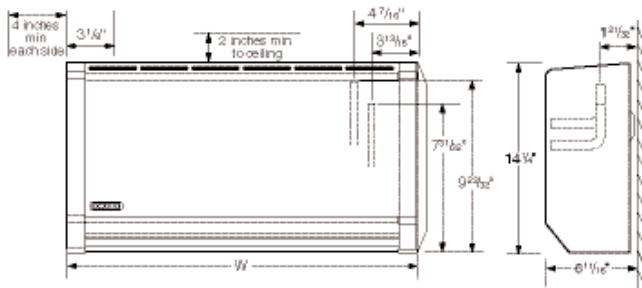

Front View

Side View



Top View

NOTE: Piping and wiring openings are accessible from either top or back.  
NOTE: For surface mounting application only.

DIMENSIONS

MODEL	W
HC 20-14	46-3/32"
HC 15-10	34-15/16"
HC 10-6	26-7/8"
HC 7-4	21-13/16"

Model	Flow Rate (gpm)	Friction Loss (head) FT WG
HC 20-14	1.0 / 3.0	0.58 / 2.68
HC 15-10	1.0 / 3.0	0.45 / 2.08
HC 10-6	1.0 / 3.0	0.27 / 1.57
HC 7-4	1.0 / 3.0	0.22 / 1.36

COOLING MODEL ONLY: Entering Water/Air Temp. Diff. °F

Model	Flow Rate	Fan Speed	Latent* — BTU/hr			Sensible — BTU/hr		
			25°F	35°F	45°F	25°F	35°F	45°F
HC 20-14 RC	3 gpm	Boost	5320	8750	12689	4528	6325	6998
		Medium	5018	8261	11988	4123	5707	6550
		Normal	4172	6867	9964	3437	4613	5292
HC 15-10 RC	3 gpm	Boost	4241	6978	10124	3633	5123	5767
		Medium	3182	5238	7600	2707	3781	4183
		Normal	2943	4842	7023	2530	3582	4061
HC 10-6 RC	3 gpm	Boost	2592	4266	6189	2121	3096	4091
		Medium	2145	3529	5119	1813	2517	2741
		Normal	1920	3158	4579	1627	2268	2487
HC 7-4 RC	3 gpm	Boost	1906	3137	4550	1526	2227	1941
		Medium	1572	2589	3758	1347	1898	2138
		Normal	1057	1740	2525	912	1294	1477

\*These figures are at 50% relative humidity.

HI-LINE HC RC (Heater/ Cooler) FAN CONVECTOR SPECIFICATIONS — Engineered to be efficient.

Controls... The supplied infrared remote control system can be operated in automatic or manual mode. In automatic mode, the desired room temperature is programmed into the unit and fan speed is automatically adjusted until temperature is achieved. In manual mode, 3 fan speeds can be selected.

The low temperature Aquastat is adjustable for 110°F or 90°F ON. The remote control adjusts fan speed or temperature settings.

Warranty... MYSON offers a full ten year warranty on the heat exchanger and a full three year warranty on the fan motor.

Construction... The chassis is manufactured from zinc-coated painted steel. Fan assemblies have ball bearings for longer life and quieter service.



## Lo-Line RC Heater and RC Heater/Cooler Fan Convectors

High efficiency in heating and cooling

Re-engineered to achieve higher efficiencies and super quiet performance, Myson's Lo-Line RC and Lo-Line RC Heater/Cooler provide instant warmth and super quiet operation in a limited space.

- Lo-Line RC and Lo-Line RC Heater/Cooler deliver 3,709 to 19,637 Btu/hr, replacing up to an amazing 37.4 feet of baseboard
- Remote control
- 4 models and 3 fan speeds

- NEW multi-function digital control
- ETL Approval
- Lo-Line has a 3 year product warranty; 10 year warranty for the heat exchanger



Lo-Line 19-15 RC



Lo-Line RC Heater Fan Convectors • Btu/hr Heat Output — entering air @ 65°F

Model	Flow Rate (gpm)	Fan Speed	Air Delivery (cfm)	Entering water temperature (°F)									
				110	120	130	140	150	160	170	180	190	200
Lo-Line 19-15 RC	1	Boost	197	7040	8531	10011	11481	12942	14397	15844	17286	18723	20154
		Medium	162	6359	7705	9040	10367	11686	12998	14304	15605	16901	18193
		Normal	142	5611	6798	7975	9145	10308	11465	12617	13764	14906	16045
	3	Boost	197	7997	9691	11372	13042	14702	16354	17999	19637	21269	22895
		Medium	162	7224	8753	10270	11777	13275	14766	16250	17728	19200	20667
		Normal	142	6374	7722	9060	10389	11710	13024	14333	15636	16933	18227
Lo-Line 14-10 RC	1	Boost	169	5402	6545	7679	8805	9924	11038	12146	13250	14350	15445
		Medium	118	4619	5595	6564	7526	8482	9434	10381	11324	12263	13199
		Normal	94	3799	4601	5397	6188	6974	7755	8533	9308	10080	10848
	3	Boost	169	6137	7435	8723	10002	11274	12539	13798	15052	16301	17546
		Medium	118	5247	6356	7457	8550	9636	10717	11793	12864	13931	14994
		Normal	94	4316	5227	6132	7030	7922	8810	9694	10574	11450	12324
Lo-Line 9-6 RC	1	Boost	103	3592	4350	5103	5850	6592	7331	8066	8798	9526	10253
		Medium	76	2882	3490	4093	4691	5286	5878	6467	7053	7637	8219
		Normal	66	2222	2692	3157	3619	4078	4535	4989	5442	5893	6342
	3	Boost	103	4081	4942	5797	6645	7489	8328	9163	9994	10822	11647
		Medium	76	3274	3964	4649	5329	6005	6678	7347	8013	8676	9337
		Normal	66	2525	3058	3586	4111	4633	5151	5668	6182	6694	7204
Lo-Line 6-4 RC	1	Boost	72	2349	2844	3336	3824	4309	4791	5271	5749	6225	6700
		Medium	51	1720	2083	2443	2800	3155	3508	3860	4210	4558	4905
		Normal	38	1518	1837	2154	2468	2781	3092	3401	3709	4015	4321
	3	Boost	72	2668	3231	3790	4344	4895	5443	5988	6531	7072	7611
		Medium	51	1954	2366	2775	3181	3584	3985	4385	4782	5178	5572
		Normal	38	1724	2087	2447	2804	3159	3512	3863	4213	4561	4908

Lo-Line RC Heater Fan Convector Comparison @ 180°F Water Temperature

Lo-Line Model	Fan Speed	Baseboard (525 Btu/ft)	C.I. Radiators (225 Btu/sq ft)	H	Dimensions			Weight Unit (lbs)	Weight Packed (lbs)	Friction Loss (head)	
					W	D	FT WG			1 gpm	3 gpm
19-15 RC	Boost/Med/Low	37.4 / 33.8 / 29.8	87.3 / 78.8 / 69.5	18-1/2"	45-7/8"	5-1/2"	48	52	0.6	3.0	
14-10 RC	Boost/Med/Low	28.7 / 24.5 / 20.1	66.9 / 57.2 / 47.0	18-1/2"	35-7/8"	5-1/2"	39	43	0.4	2.4	
9-6 RC	Boost/Med/Low	19 / 15.3 / 11.8	44.4 / 35.6 / 27.5	18-1/2"	25"	5-1/2"	21	25	0.4	2.3	
6-4 RC	Boost/Med/Low	12.4 / 9.1 / 8.0	29 / 21.3 / 18.7	18-1/2"	20-1/4"	5-1/2"	16	20	0.4	2.1	

Lo-Line RC Heater/Cooler Fan Convector Cooling Mode: Entering Water / Air Temp. Diff. °F

Model	Flow Rate (gpm)	Fan Speed	Latent* — Btu/hr			Sensible — Btu/hr		
			25°F	35°F	45°F	25°F	35°F	45°F
Lo-Line HC 19-15 RC	3	Boost	5128	8203	11650	4366	5929	6425
		Medium	4896	7832	11124	4024	5442	6077
		Normal	4482	7169	10181	3693	4816	5407
Lo-Line HC 14-10 RC	3	Boost	4108	6570	9330	3519	4823	5315
		Medium	3451	5522	7843	2937	3986	4317
		Normal	2934	4691	6660	2523	3469	3851
Lo-Line HC 9-6 RC	3	Boost	2376	3799	5394	1943	2757	3564
		Medium	2007	3208	4555	1696	2288	2439
		Normal	1669	2669	3790	1414	1916	2059
Lo-Line HC 6-4 RC	3	Boost	1659	2653	3769	1328	1884	2435
		Medium	1308	2093	2973	1121	1535	1691
		Normal	1074	1718	2440	927	1277	1427

\* These figures are at 50% relative humidity

## Slim-Line RC Fan Convectors

Small yet powerful

Slim-Line RC's compact design makes it the ideal choice for narrow spaces such as entryways, alcoves or short walls where nothing else fits as well.

- Delivers 9,072 Btu/hr to 15,293 Btu/hr
- Replaces up to 29 feet of baseboard
- NEW multi-function digital control
- Remote control
- 3 fan speeds
- 100% heat output certified by ATL, an independent testing lab
- Slim-Line has a 3 year product warranty; 10 year warranty for heat exchanger







Slim-Line SLRC

Slim-Line

**Slim-Line RC Fan Convector • Btu/hr Heat Output — entering air @ 65°F**

Model	Flow Rate (gpm)	Fan Speed	Air Delivery (cfm)	Entering water temperature (°F)									
				110	120	130	140	150	160	170	180	190	200
Slim-Line RC	1	Boost	186	5029	5663	6657	7661	8664	9668	10572	11678	12680	13864
		Medium	127	4385	4881	5887	6745	7651	8559	9567	10374	11281	12186
		Normal	96	3743	4207	5018	5829	6639	7450	8261	9072	9883	10694
	3	Boost	186	6597	7404	8719	10034	11349	12663	13987	15293	16608	17923
		Medium	127	5743	6457	7646	8831	10023	11411	12399	13588	14776	16280
		Normal	96	4902	5510	6572	7634	8696	9758	10820	11882	12944	14008

**Slim-Line RC Heat Comparison @ 180°F Water Temperature**

Model	Flow Rate (gpm)	Fan Speed	Baseboard (525 Btu/ft)	C.I. Radiators (225 Btu/sq ft)	H	Dimensions			Weight Unit (lbs)	Weight Packed (lbs)	Flow Rate (gpm)	Friction Loss (head)	
						W	D	FT				WG	
Slim-Line RC	3.0	Boost	29.2	68.0	31-7/8"	15-9/16"	6-11/16"	37	40	2.0	0.5	0.66	
		Medium	25.9	60.4							1.0	1.84	
		Normal	22.6	52.8							1.5	3.81	
	1.0	Boost	22.2	51.9	2.0	5.81							
		Medium	19.7	46.1									
		Normal	17.2	40.3									

## CSU Fan Convectors

Economical and compact

Efficiently designed and manufactured to deliver optimum and responsive heat at a very affordable price.

- Delivers 5,319 to 16,947 Btu/hr
- Replaces up to 32.2 feet of baseboard
- 3 models
- 2 fan speeds
- Units mount directly on wall or floor; use optional legs to cover piping and wiring
- Durable epoxy/polyester finish protects the metal cabinet for years and years
- CSU has a 3 year product warranty; 10 year warranty for the heat exchanger





CSU

**CSU Fan Convectors • Btu/hr Heat Output — entering air @ 65°F**

Model	Flow Rate (gpm)	Fan Speed	Air Delivery (cfm)	Entering water temperature (°F)									
				120	130	140	150	160	170	180	190	200	210
CSU-10M	3.0	Boost	99	2437	3226	4173	5195	6040	6852	7763	8659	9500	10341
		Normal	62	1190	1954	2529	3165	3823	4481	5319	5973	6609	7245
CSU-15M	3.0	Boost	91	1928	3886	4994	6102	7203	8715	10331	11947	14000	15053
		Normal	66	1524	2484	3452	4418	5385	6352	7317	8282	9240	10198
CSU-23M	3.0	Boost	129	4400	6481	8573	10665	12750	14838	16947	19027	21000	23235
		Normal	92	2018	3461	4687	5751	6983	8260	9518	10813	12262	13771

**CSU Heat Comparison @ 180°F Water Temperature**

Model	Flow Rate (gpm)	Fan Speed	Baseboard (525 Btu/ft)	C.I. Radiators (225 Btu/sq ft)	Dimensions			Weight Unit (lbs)	Weight Packed (lbs)	Flow Rate (gpm)	Friction Loss (head) FT WG
					H	W	D				
CSU-10M	3.0	Boost/Normal	14.7 / 10.1	34.5 / 23.6	13-1/4"	5-3/8"	4-28/32"	17	20	0.45	2.58
CSU-15M	3.0	Boost/Normal	19.6 / 13.9	45.0 / 32.5	13-1/4"	35-7/8"	4-28/32"	22	25	0.70	3.22
CSU-23M	3.0	Boost/Normal	32.2 / 18.1	75.0 / 42.3	13-1/4"	41-3/8"	4-28/32"	28	31	0.78	3.66

## Fan Convectors Limited Warranty

Myson warrants the original purchaser that products manufactured and/or supplied by them will be free from defects in materials and workmanship under normal conditions of use, when properly installed and maintained in accordance with Myson's instructions for a period of 36 months (12 months for Whispa E50). (Hydronic heat exchangers have a 10 year warranty.) During this warranty period, Myson will, at its option, repair or replace any product, or part thereof, which shall be returned to the Myson factory and determined by Myson to be defective.

**THE PARTS WARRANTY:** Myson warrants replacement parts, when properly installed and maintained for a period of 120 days from the date of purchase.

There are no warranties, expressed or implied, that extend beyond this warranty description. In no event will Myson be liable for labor or consequential damages.



heating through innovation.